

CAT. 6 UTP 28AWG, 250MHz, LSZH Outdoor

PGS-FL68-11SD441X1

STANDARD COMPLIANCE

UL LISTED: UL444

ANSI/TIA-568-C.2 CATEGORY 6: HORIZONTAL CABLE

IEC 61156-5 FOR HORIZONTAL CABLE


IEC60332-1-2 FLAME TEST

RoHS COMPLIANCE FOR THE REQUIREMENT OF EUROPEAN UNION ISSUED DIRECTIVE 2011/65/EU

UL VERIFIED TO IEC 62821-1 LSHF(Low-Smoke-Halogen-Free) JACKET



SECTION PLANS

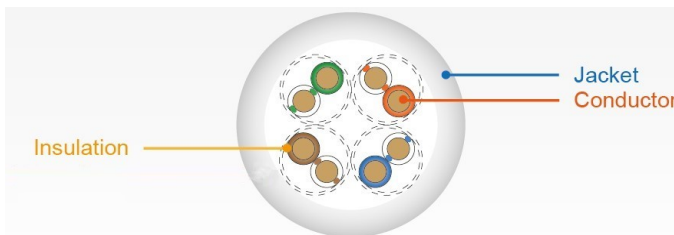

CONSTRUCTION

		CAT. 6 UTP SOLID
CONDUCTOR	MATERIAL & SIZE	BARE COPPER, 28AWG
	DIAMETER	1/0.32mm +/-0.003mm
INSULATION	MATERIAL	HDPE(CMI-75E)
	THICKNESS	MIN. AVERAGE THICKNESS: 0.13mm MIN.THICKNESS: 0.10mm
	COLOR CODE	Pair 1: Blue & White/Blue Pair 3: Green & White/Green Pair 2: Orange & White/Orange Pair 4: Brown & White/Brown
	DIAMETER	0.55 +/-0.03mm
	TENSILE STRENGTH	16.5 MPa / 2400 PSI
	ULTIMATE ELONGATION	≥300%
JACKET	MATERIAL	CMX-LSHF Compound Outdoor
	THICKNESS	MIN. AVERAGE THICKNESS: 0.585mm MIN.THICKNESS: 0.485mm
	OVERALL DIAMETER	3.8mm +/-0.3mm
	MINIMUM BENDING RADIUS	≥ 8 TIMES OF OVERALL DIAMETER
	MAXIMUM PULLING TENSION	MAX. 85N
	TENSILE STRENGTH	8.3MPa / 1200 PSI
	ULTIMATE ELONGATION	≥100%

ELECTRIC REQUIREMENT

	CAT. 6 UTP SOLID
CHARACTERISTIC IMPEDENCE(Zo)	85~115Ω (1~250MHz)
DC. RESISTANCE CAPACITANCE UNBALANCE	5%
PAIR-TO-GROUND CAPACITANCE UNBALANCE	330 pF/100M MAX.
CONDUCTOR RESISTANCE	23.6Ω/ 100M 20°C MAX.
MUTUAL CAPACITANCE	5600 pF/100M MAX.
SPARK TEST	2.5KV
NOMINAL VELOCITY OF PROPAGATION (N.V.P.)	69%

CAT. 6 UTP 28AWG, 250MHz, LSZH Outdoor

PGS-FL68-11SD441X1

ENVIRONMENTAL CONDITION & USAGE

TEMPERATURE RANGE	SHIPPING & STORAGE	-20°C to 75°C
	INSTALLATION	0°C to 50°C
	OPERATION	-10°C to 60°C

TRANSMISSION REQUIREMENTS

FREQUENCY (MHz)	MAX. ATTENUATION (dB/100m)	MIN, Pr-Pr NEXT (dB)	MIN. PSNEXT (dB)	MIN. RETURN LOSS (dB)
1	4.0	74.3	72.3	20.0
10	12.0	59.3	57.3	25.0
20	19.5	54.8	52.8	25.0
31.25	26.7	51.9	49.9	23.6
62.5	32.4	47.4	45.4	21.5
100	45.8	44.3	42.3	20.1
200	50.0	39.8	37.8	18
250	60.8	38.3	36.3	17.3

Values show on tables above are for reference purpose only.

MARKING & PACKAGING

PACKAGING	500FT/ BOX	1000FT/ BOX
APPROX. WEIGHT(kg)		
DIMENSION(mm)		
PACKAGES per PALLET		
MARKING	TYPE CMX-LSHF 4PR 28AWG 75°C (UL) E495789 P ANSI/TIA-568-C.2 UTP Cat.6 LSZH PT pactech FlexLite PGS-FL68-11SD441X1 SOLID Outdoor BATCH NO. RoHS 1000FT...2FT	